
Fully Enclosed Check Valve

The series DBMJ-F check valve effectively ensures monodirectional flow of slurries, sewerage, sludge and other hard to handle fluids.


The valve consists of an elastomer duckbill type check valve inside a steel housing. This simple rugged design eliminates mechanical parts which can wear and jam in conventional check valves. They are available in a variety of elastomer compounds, with a carbon steel fabricated housing.



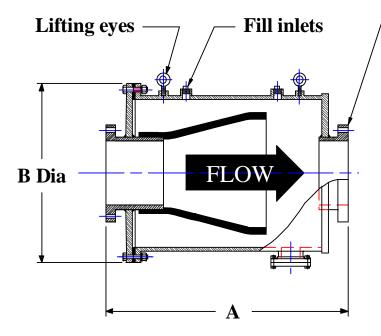

All dimensions are in inches. Weights are in Lb.

 Flanges are 125 # ANSI standard Flat Face



Size	14	16	18	20	24	30	36	42	48	54	60
А	35.00	47.00	45.00	50.00	60.00	70.00	85.00	90.00	100.00	110.00	120.00
В	28.00	32.00	35.00	43.00	50.00	66.00	77.00	90.00	102.00	126.00	130.00
С	3.00			6.00							
Wt, lb	800	950	1300	1800	2100	2400	3500	5000	6500	7250	9000

ONYX VALVE CO

835 Industrial Hwy P: 856-829-2888 www.onyxvalve.com Cinnaminson NJ 08077 Fx: 856-829-3080